

A man in a blue sweater is sitting at a small round table outdoors. On the brick wall behind him, a black rectangular heater is mounted. The heater has a red glow visible through its tinted visor.

MANUAL



IP65-Rated

Mid Infrared Heater

With Tinted Visor

Please refer to this manual for assistance with setting up and getting the most out of your heater.


THANK YOU FOR YOUR PURCHASE

CONTENTS


PAGE 2	GET TO KNOW YOUR HEATER
PAGE 3 - 4	MOUNTING INFORMATION
PAGE 5	FAQ / TROUBLESHOOTING, TECHNICAL DATA

GET TO KNOW YOUR HEATER


- 1 This heater is an IP65 rated mid infrared bar heater.
- 2 This heater is suitable for any number of applications, such as smoking areas, courtyards, lounge sets etc.
- 3 Suitable for indoor use and outdoor use.

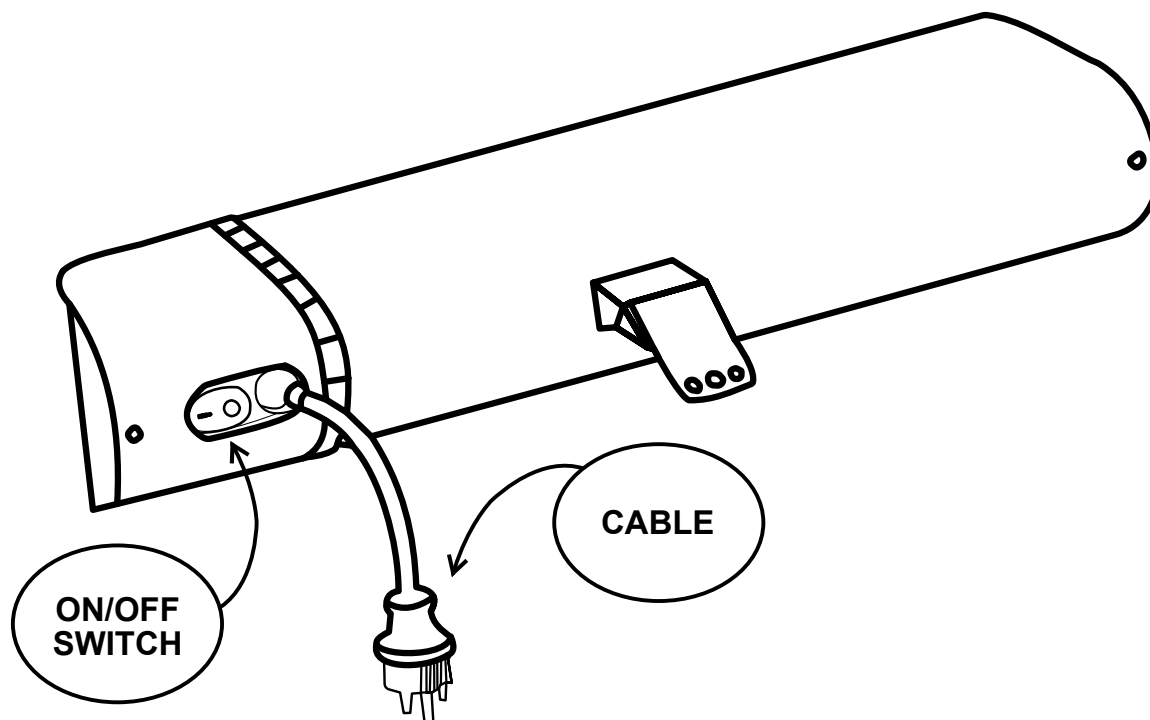

MOUNTING DISTANCES

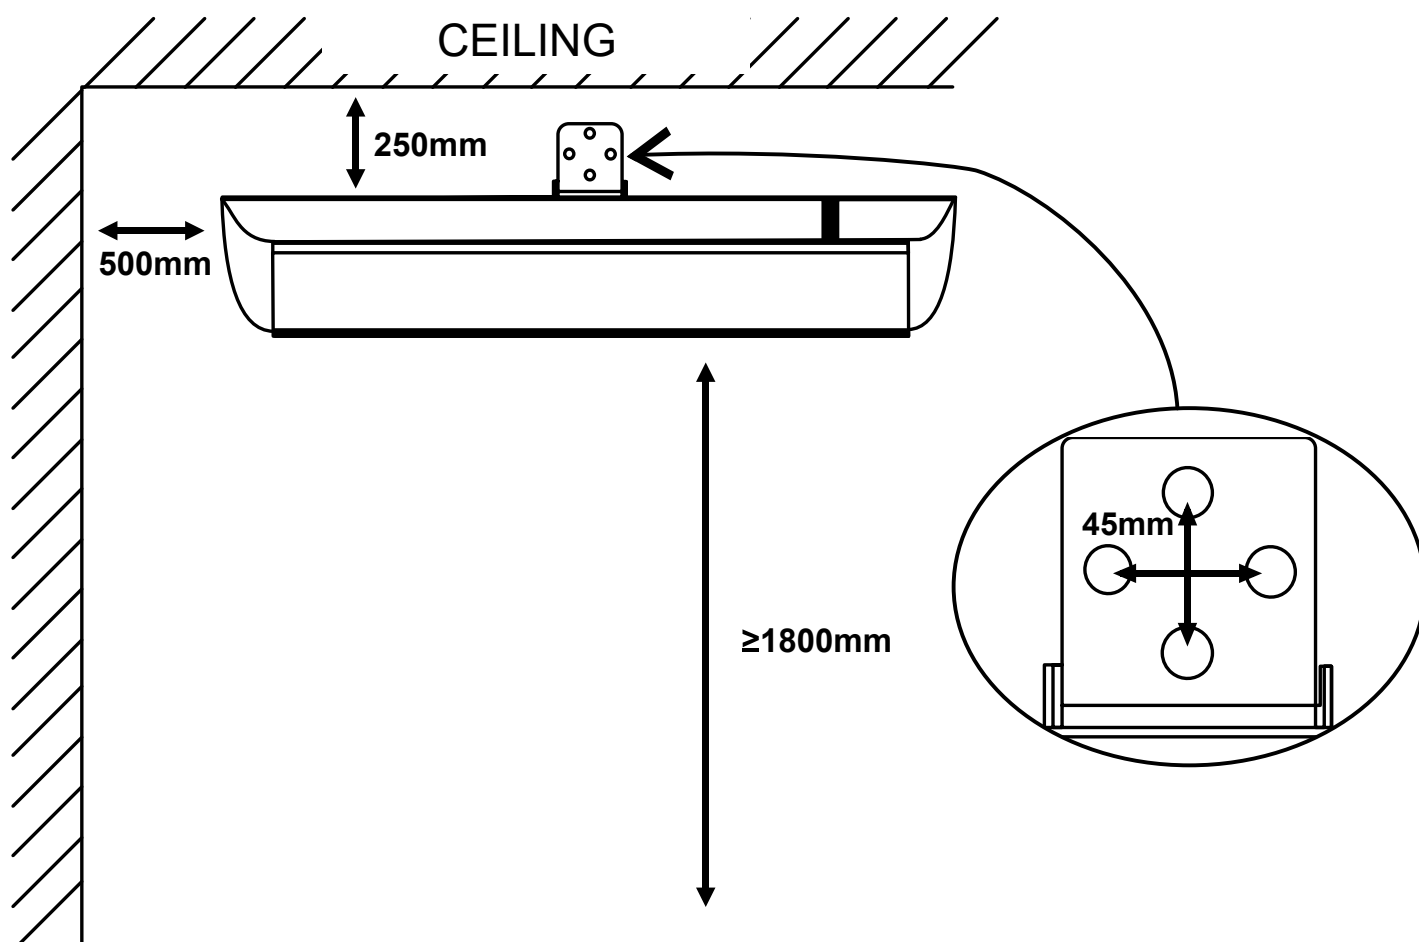

MOUNTING POSITIONS

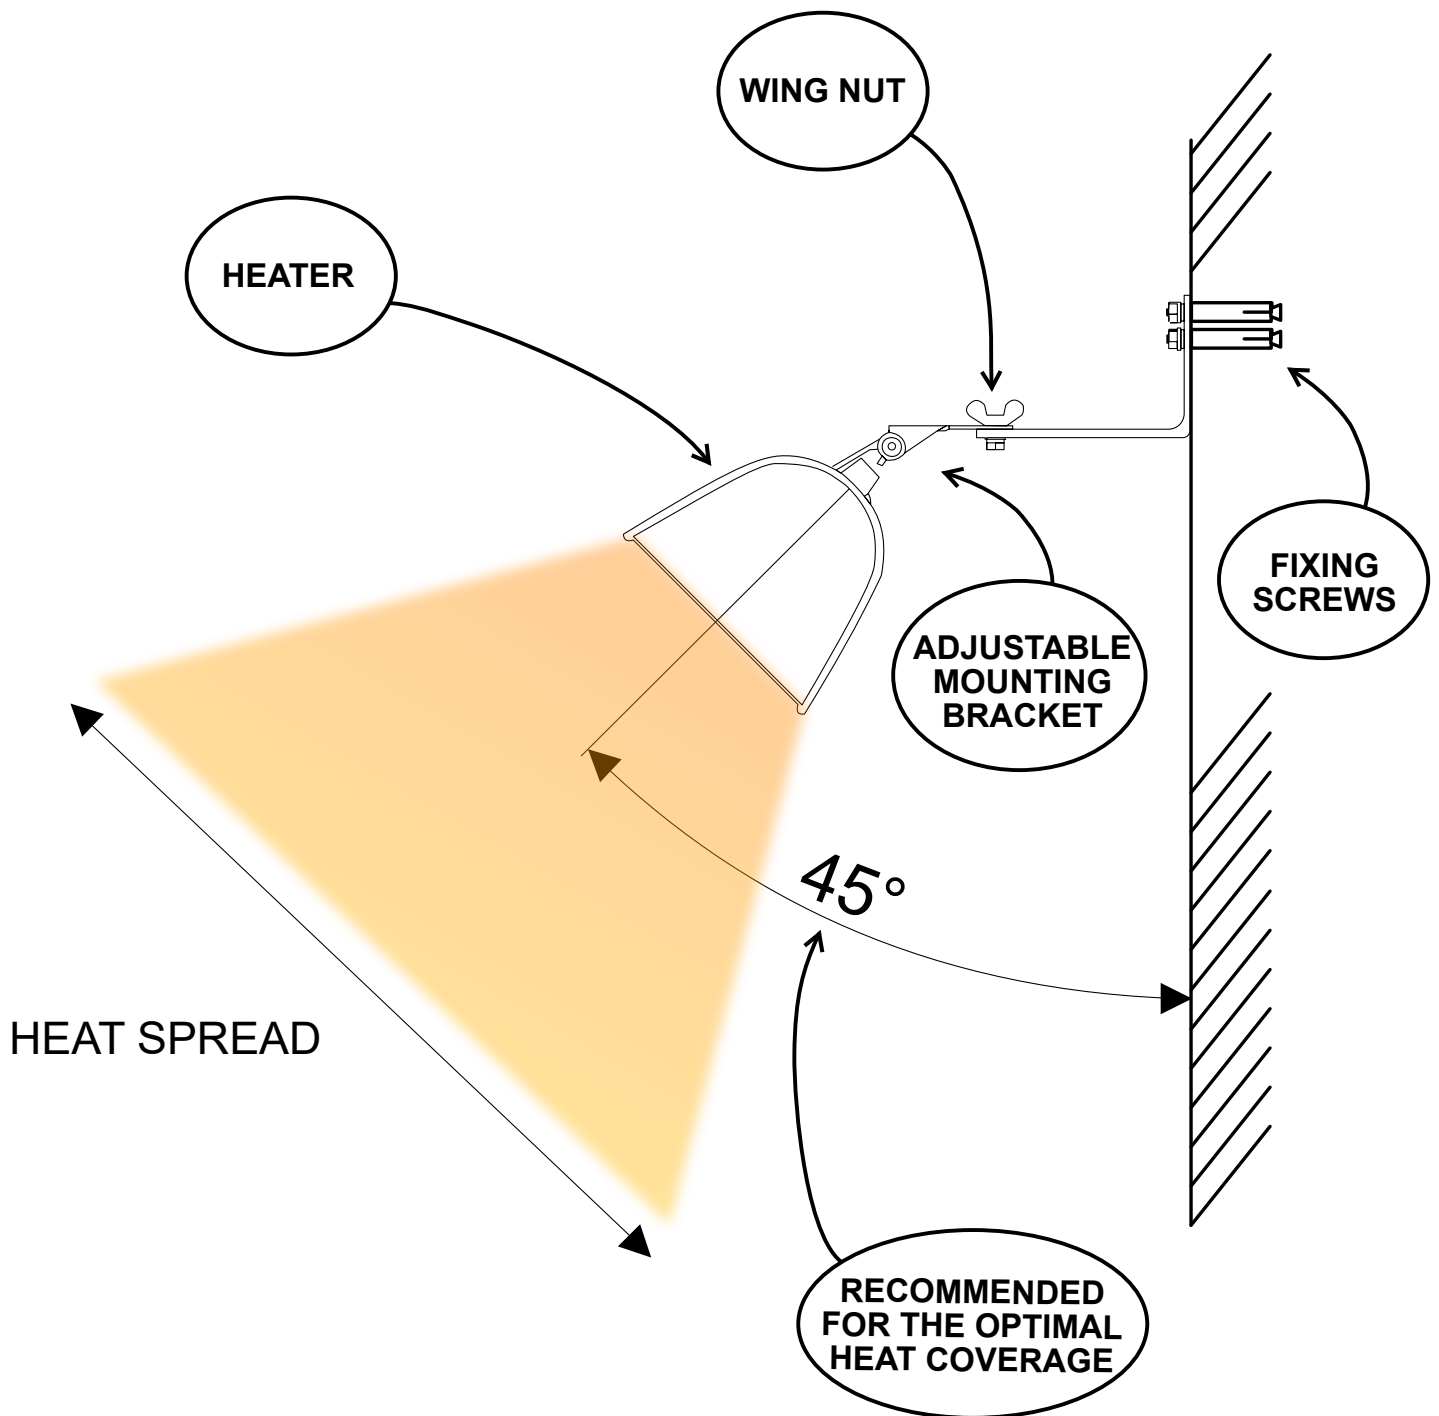

IF YOU HAVE ANY TECHNICAL ISSUES OR IF YOU HAVE ANY QUESTIONS WHILST SETTING UP YOUR HEATER, PLEASE GET IN TOUCH.

FAQ / TROUBLESHOOTING

WHY WON'T MY HEATER TURN ON/OFF?

- 1 Ensure the On/Off switch toward the rear of the unit has been activated/deactivated.
- 2 If plugged in, try using a different plug socket to test the plug and heater separately.
- 3 If hardwired, contact a qualified electrician.
- 4 If using an external controller, check your settings and ensure it is functioning properly.

CAN I CONNECT A REMOTE?

- 1 Although this heater does not come with a remote controller, almost any external controller can be used alongside it, so long as the loading is sufficient.

DOES THE COLOUR CHANGE?

- 1 The red glow is the heating element inside, and the tinted visor at the front only comes in 1 colour.

DO I NEED TO PURCHASE SEPARATE BRACKETS?

- 1 The mounting bracket is built into the rear of the unit, so you don't need to purchase any extra mounting brackets.
- 2 All necessary parts come included

TECHNICAL DATA FOR THE HEATING UNIT

Part Code	ART2KW
Heating method	Mid Infrared
Input Voltage	220-240V~
Surface temperature	130-150°C
Power Consumption	2000W
IP Rating	IP65
Power cord length	2m + UK Plug
Heat Projection Angle	60°±5°

THIS MANUAL IS APPLICABLE FOR:

ART2KW